

FABRICS/MATERIALS

Our range of roller fabrics has been taken from suppliers throughout Europe and contains a wide range of plain and patterned fabrics. Many of the fabrics used are suitable for commercial installation and are therefore flame-retardant.

Another major factor in the choice of fabrics for modern buildings with large areas of glass is that of the solar gain. SPC is a special, solar protective, reflective coating, applied to one side of the fabric only. This ensures that the natural colouring and texture on the reverse is maintained. The application significantly improves the fabric's solar performance, and also reduces glare on VDU screens.

At the other end of the scale are opaque fabrics; these have zero light transmittance. Again refer to individual fabric specifications for exact solar and optical figures of each fabric.

Many roller blind fabrics are also manufactured in matching vertical and pleated blinds; this also includes some of the SPC fabrics.

Ten styles of trim are available including Arches, Castille and Temple with a selection of poles. Braids in co-ordinating colours are used to enhance the finish of the blinds.

Spring Operated Blinds are supplied with plastic acorns as standard, or further enhance the appearance by choosing from our extensive range of designer toggles.

Please refer to individual fabric specification for the exact standards.



FIXING

There is a range of different types of fixing brackets made from galvanised steel and providing secure, easy and quick mounting of the blind. The brackets allow the blind to be easily removed for cleaning.

MAINTENANCE

A light dusting, or vacuuming on a low setting, or with a brush appliance, is all that is required to keep Roller Blinds looking good.

Also available as Perfect Fit.

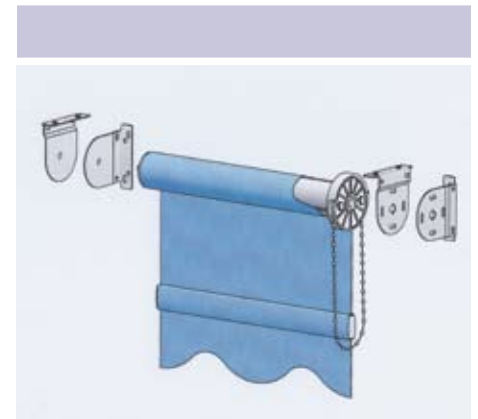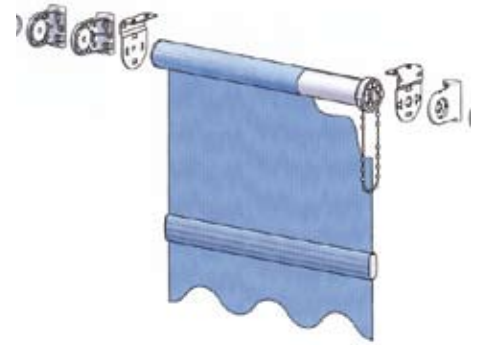

RECOMMENDATIONS

	Max Width	Max Drop	Max Area
32mm:	2000	3500	7 sq m
40mm:	2500	3500	8.75 sq m
45mm:	3000	3500	10.5 sq m
Electric Operation:	subject to fabric	3500	

Minimum Width

Endless cord:	200mm
System 32	
Spring-operated:	360mm
Electric:	600mm (for 240v motor) 350mm (for 24v motor)

DECLARATION OF QUALITY: All products detailed in this literature are manufactured exclusively in our own factory. This allows complete control over quality and also enables delivery to be tailored and guaranteed for each individual project. We are constantly striving to improve the product and reserve the right to alter specifications without notice.

