

FIXING

The blinds may be fitted inside or outside the window openings. Fixing can either be done by drilling the head box and fixing directly to the window, or by use of special brackets.

MAINTENANCE



A light dusting, or vacuuming on a low setting, or with a brush appliance, is all that is required to keep your blinds looking good.

RECOMMENDATIONS

FOR THE MAXIMUM/MINIMUM WIDTH AND AREAS SEE THE TABLE BELOW

The table shown indicates the maximum width, drop and area which can be manufactured with each box size, control option and roller size. All maximum area are based on fabric weight of 400gsm, which is the weight of a standard blackout fabric

Roller Size	45mm	65mm	85mm
Spring	1.5m Wide	1.5m Wide	
23mm	1.5m Drop 2.3 sq m	3.0m Drop 3 sq m	N/A
32mm	2.0m Wide 1.0m Drop 2 sq m	2.0m Wide 2.5m Drop 5 sq m	2.0m Wide 3.0m Drop 6 sq m
36mm	N/A	3.0m Wide 2.5m Drop 6 sq m	3.0m Wide 3.0m Drop 7 sq m
Crank		3.0m Wide	2.5m Wide
36mm	N/A	2.5m Drop 6 sq m	3.0m Drop 7.5 sq m
42mm	N/A	N/A	3.2m Wide 3.5m Drop 9 sq m
Chain	1.5m Wide	1.5m Wide	
23mm	1.5m Drop 2.3 sq m	3.0m Drop 3 sq m	N/A
32mm	2.0m Wide 1.0m Drop 2 sq m	2.0m Wide 2.5m Drop 5 sq m	2.0m Wide 3.0m Drop 6 sq m
36mm	N/A	3.0m Wide 2.5m Drop 6 sq m	3.0m Wide 3.0m Drop 7 sq m
Electric	1.5m Wide	2.0m Wide	
28mm	1.5m Drop 2.3 sq m	2.5m Drop 5 sq m	N/A
40mm	N/A	N/A	3.0m Wide 3.5m Drop 9 sq m

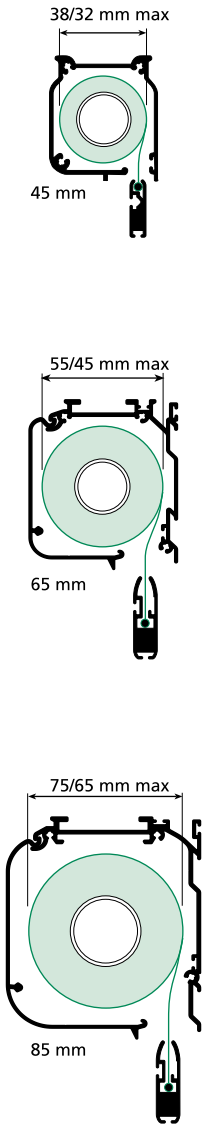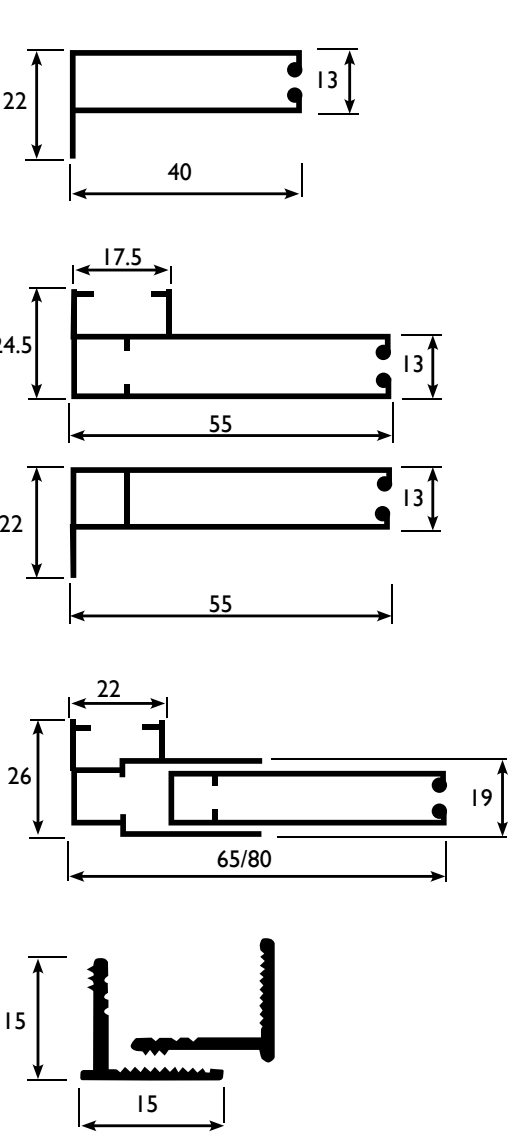

DECLARATION OF QUALITY: All products detailed in this literature are manufactured exclusively in our own factory. This allows complete control over quality and also enables delivery to be tailored and guaranteed for each individual project. We are constantly striving to improve the product and reserve the right to alter specifications without notice.